



Recall Campaign

NHTSA#: 16V-560

TC#: 2016-380



Date of Publication: August 2016

WARNING
DO NOT TOW YOUR TRAILER UNTIL THE SWAY COMMAND SYSTEM IS DISCONNECTED

INSTRUCTIONS TO DISCONNECT THE SWAY COMMAND



- Fig 1:** Locate the Sway Command control box on the front crossmember of the trailer.
Fig 2: On some trailers, the Sway Command control is behind a front panel and can be accessed from underneath the propane tanks.

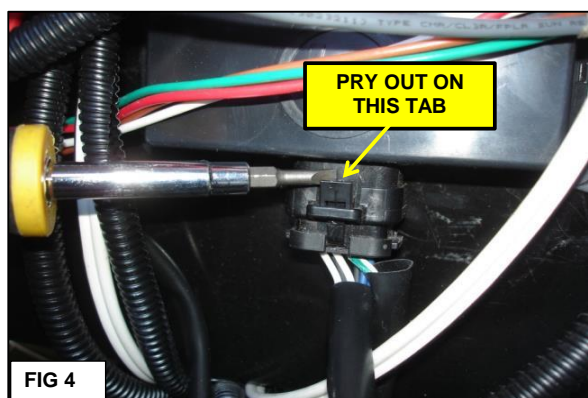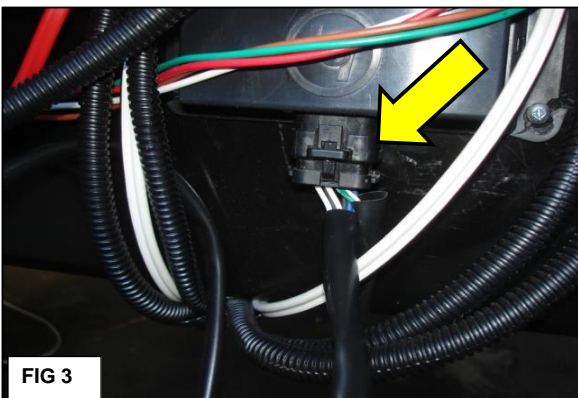

- Fig 3:** Locate the harness connector at the bottom of the Sway Command control box.
Fig 4: Press outward on the tab of the connector using a flat blade screwdriver.
Unplug the connector from the Sway Command control box. Secure to other wiring with a wire tie.

For assistance please contact Jayco Customer Service at 800-283-8267 or a Jayco Dealer.