
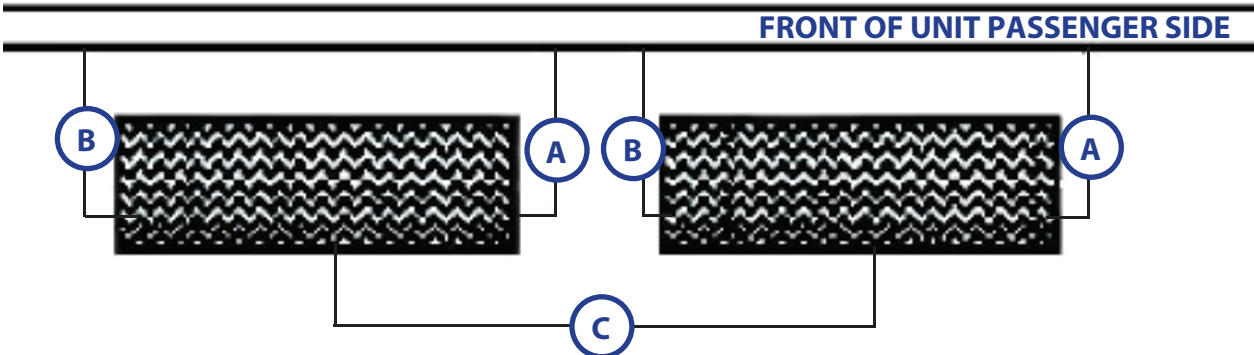
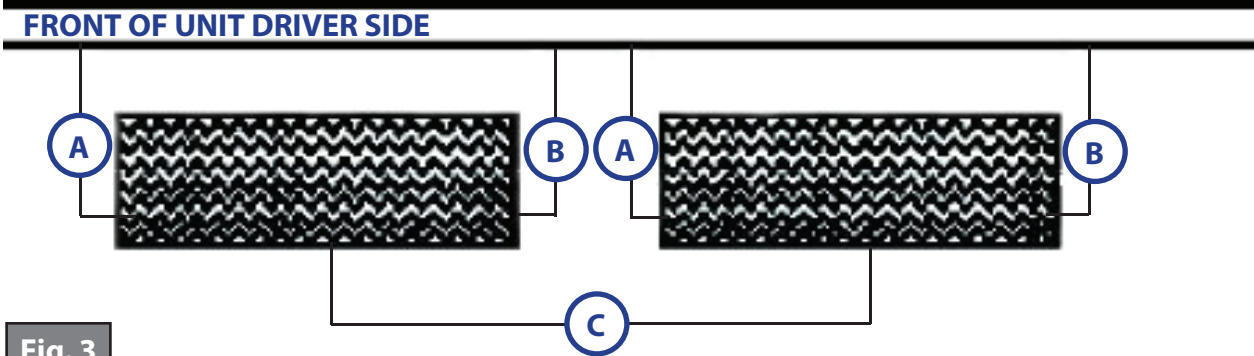


AXLES AND SUSPENSION

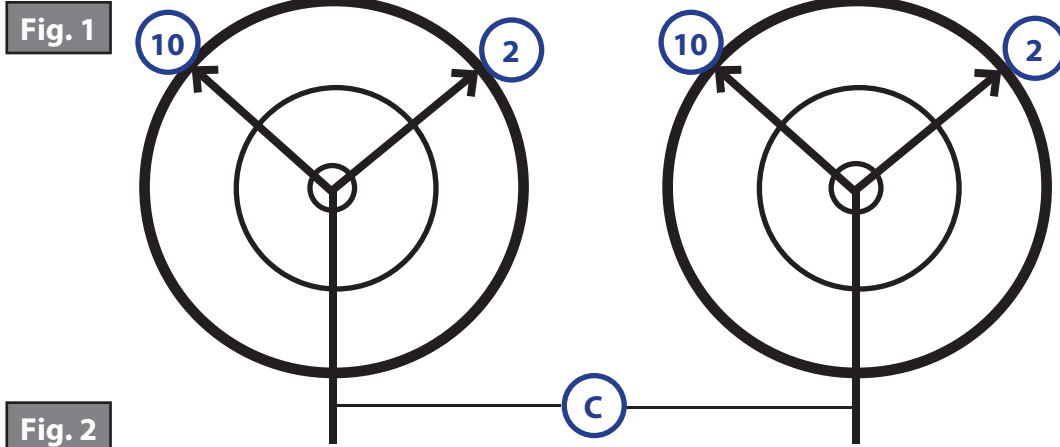

At the "10" and "2" positions on each tire (Fig. 1), measure the distance between the center tread of the tire and the main rail of the frame at both the forward side (Fig. 2 and 3) of the tire (A) and the rear side (Fig. 2 and 3) of the tire (B). The (A) position measurement should be smaller than the (B) position measurement. The (C) measurements (Fig. 1, 2 and 3) are to be equal.

	A	B	C
DRIVER SIDE FRONT			
DRIVER SIDE REAR			
PASSENGER SIDE FRONT			
PASSENGER SIDE REAR			
DRIVER SIDE (C)			
PASSENGER SIDE (C)			