

Operation

1. To turn on the remote: Press and release the blue button on the unit (Fig. 1A).
2. To turn off the remote: Press and hold the blue button (Fig. 1A).




NOTE: The remote will also automatically turn off if left idle for 2 minutes.

Syncing Remote to Receiver

1. Push and hold the blue reset button on the receiver (Fig. 2A) for approximately 5 seconds until the red LED indicator lights up (Fig. 2B). Press and hold any button on the remote for approximately 3 seconds after which the red LED on the receiver will begin to flash. When the LED goes out, the remote is ready for use.
2. Touch anywhere on the touch screen to navigate to the main menu (Fig. 3A). Before attempting to operate any of the installed slides, the hydraulic pump must be turned on. Press the "On/Off" button on the touch screen (Fig. 4A). Press any of the buttons on the screen and following the on screen instructions.

NOTE: The security light will not turn off automatically. Leaving it on for an extended amount of time will deplete battery life.

3. Service Info button navigates to a page with the LCI Customer Service contact information (Fig. 5A).

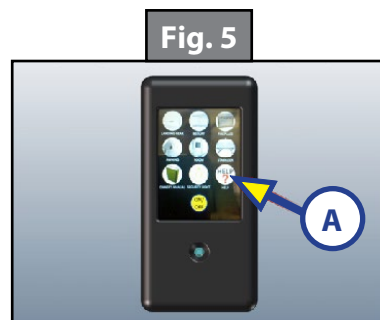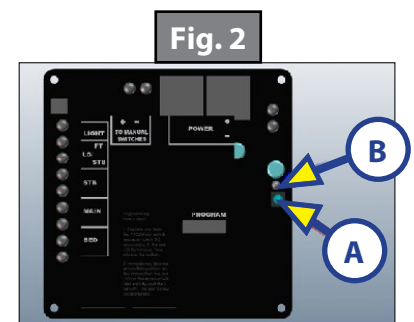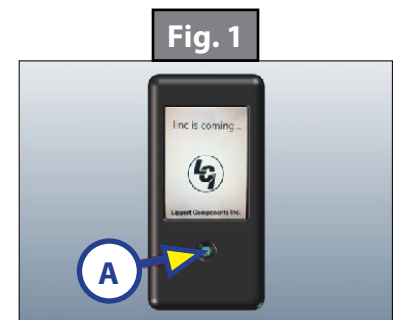

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at customerservice@lci.com. Self-help tips, technical documents, product videos and a training class schedule are available at lci.com or by downloading the MyLCI app.