
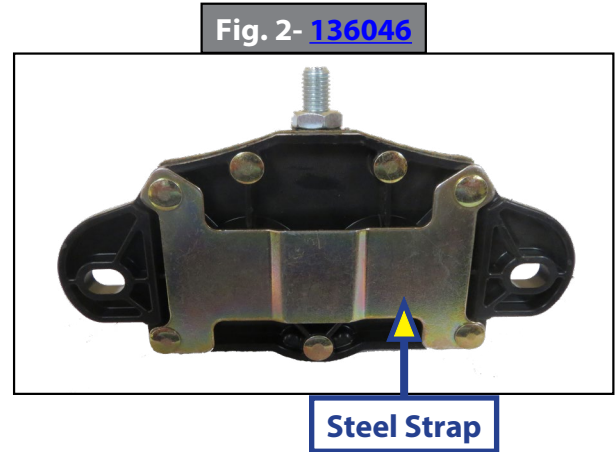




HYDRAULICS

Part #136046 (Figs. 1 & 2) is used for hydraulic power units that are rated for 2200 PSI and under. The three top posts (Fig. 1A-C) are copper. This solenoid has a steel mounting strap across its base (Fig. 2). This solenoid is used on towable units with either hydraulic slide-outs or landing gear or a combination of both.

Part #118246 (Figs. 3 & 4) is used for hydraulic power units that are rated over 2200 PSI. The three top posts (Fig. 3A-C) are silver alloy. This solenoid has no mounting strap (Fig. 4). This solenoid is used on motorized units and towable units with Level-Up.

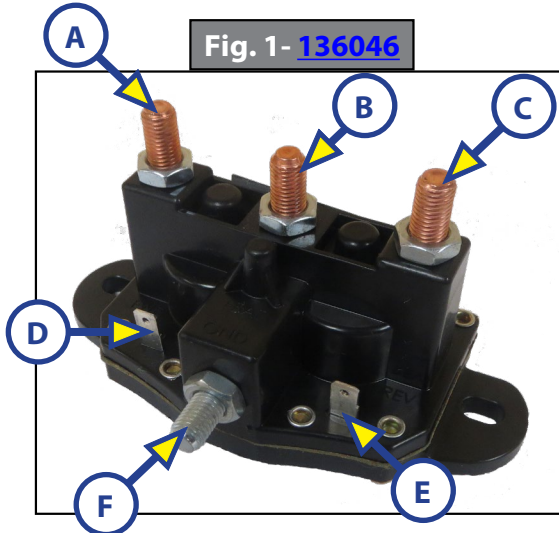

Letter	Towable - Fig. 1	Motorized - Fig. 3	Level-Up Towable - Fig. 3
A	Motor Reverse - CCW	Motor Reverse - CCW	Motor Reverse - CCW
B	Power In	Power In	Power In
C	Motor Forward - CW	Motor Forward - CW	Motor Forward - CW
D	Extend Signal	Retract Signal	Extend Signal
E	Retract Signal	Extend Signal	Retract Signal
F	Ground	Ground	Ground

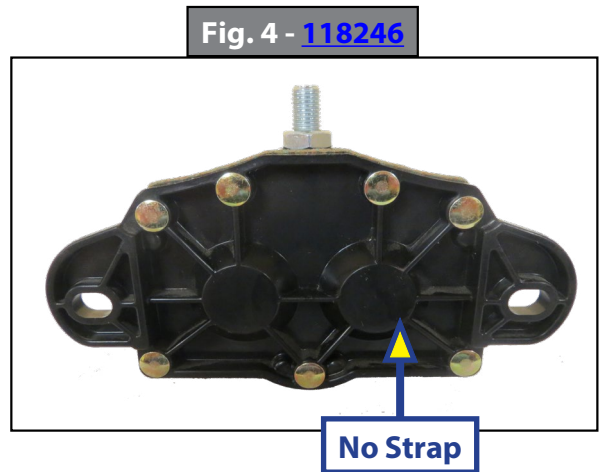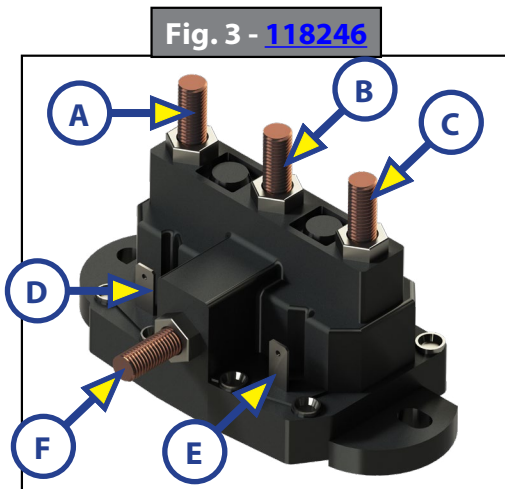

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at www.lci1.com or by downloading the MyLCI app.