

## SLIDE-OUTS

1. Start by measuring the distance between two individual adjacent teeth.
2. Using calipers or a steel rule, measure from the inside edge of one tooth (A), and then measure over to the inside edge of the next tooth (B) shown in (Fig. 1).
3. The 14.5° rack will measure approximately 0.170 inches (Fig. 2.1). The 20° rack will measure approximately 0.231 inches (Fig. 3.1).
4. The 14.5° rack will have 4 teeth per inch (Fig. 2.2). The 20° rack will have 3 teeth per inch (Fig. 3.2).

Fig. 1 Side View

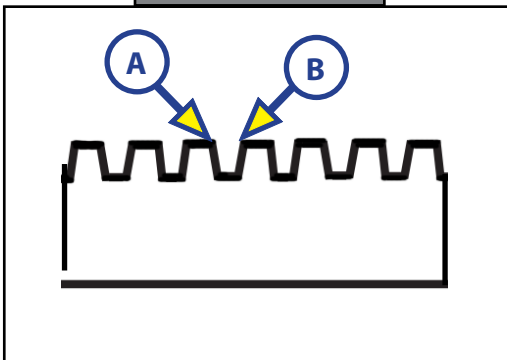


Fig. 2.1 - 14.5° Rack



Fig. 3.1 - 20° Rack

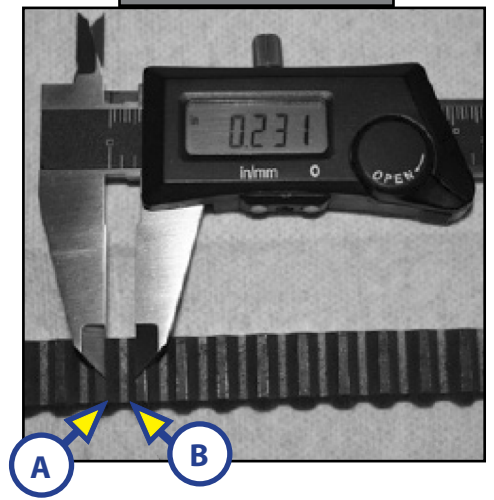


Fig. 2.2 - 14.5° Rack


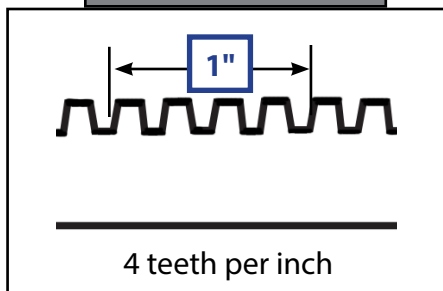


Fig. 3.2 - 20° Rack

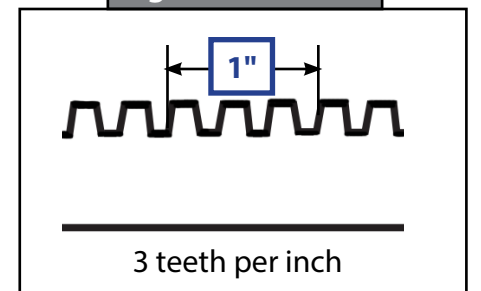

The simplest way to differentiate between the 14.5° spur gear and the 20° spur gear is the number of teeth on the gear. Spur gear [122739](#) (Fig. 4) has 18 teeth. Spur gear [101941](#) (Fig. 5) has 15 teeth.

Fig. 4





Fig. 5



As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at [customerservice@lci1.com](mailto:customerservice@lci1.com). Self-help tips, technical documents, product videos and a training class schedule are available at [www.lci1.com](http://www.lci1.com) or by downloading the MyLCI app.